

11/28/00
jc952 U.S. PTO

11-30-00

Patent Application
Docket No. 34013-00048PT
D-99018

A
jc813 U.S. PTO
09/24/00
11/28/00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re patent application of: Cappiello et al.

For: ATHERMALIZATION AND PRESSURE DESENSITIZATION OF
DIFFRACTION GRATING BASED WDM DEVICES

BOX PATENT APPLICATION
Assistant Commissioner
for Patents
Washington, D.C. 20231

CERTIFICATE OF MAILING BY EXPRESS MAIL

"EXPRESS MAIL" Mailing Label No. **EL706392525US**

Date of Deposit: **November 28, 2000**

I hereby certify that this paper or fee is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231

Type or Print Name: *Joy L. Mower*

Signature: *Joy L. Mower*

Sir:

PATENT APPLICATION TRANSMITTAL LETTER

Transmitted herewith for filing, please find the following:

- X Specification, claims and abstract of the above-referenced patent application (total of 39 pages)
- X 7 sheet(s) of drawing(s) (___ formal/ X informal).
- X Combined Declaration and Power of Attorney (^{UN-SIGNED}signed).
- ___ An Assignment of the invention to: LightChip, Inc.
- ___ A verified statement claiming small entity status under 37 CFR 1.9 and 1.27.
- X Other (specify): Acknowledgment postcard.
- X Applicant Claims Small Entity Status under 37 CFR 1.9 AND 1.27.

The filing fee has been calculated as shown below:

	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE				\$355
TOTAL CLAIMS	14-20	0	\$80	0
INDEPENDENT CLAIMS	2- 3		\$80	0
MULTIPLE DEPENDENT CLAIM(S) PRESENTED			\$270	
TOTAL FEES:				\$355.00
Deduct One-Half for Small Entity Status				
Assignment Recordal Fee			\$40	
TOTAL AMOUNT DUE:				\$355.00

— Please charge my Deposit Account No. _____ in the amount of \$_____.


— Check(s) in the amount of \$_____ is/are attached. Please charge any deficiency or credit any overpayment to Deposit Account No._____.

— The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No.


— Any patent application processing fees under 37 CFR 1.17 and under 37 CFR 1.20(d).

— The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).

— Any filing fees under 37 CFR 1.16 including fees for presentation of extra claims.


Joshua A. Griswold
Registration No. 46,310

JENKENS & GILCHRIST
3200 Fountain Place
1445 Ross Avenue
Dallas, Texas 75202-2799
214/855-4237 (Direct)
214/855-4300 (Fax)

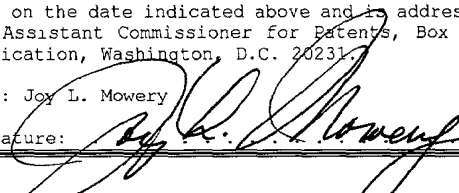CERTIFICATE OF MAILING BY EXPRESS MAIL "EXPRESS MAIL" Mailing Label No.	
Date of Deposit:	11-28-00
I hereby certify that this paper or fee is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.	
Name:	Joy L. Mowery
Signature:	

**ATHERMALIZATION AND PRESSURE DESENSITIZATION OF DIFFRACTION
GRATING BASED WDM DEVICES**

CROSS-REFERENCE TO RELATED APPLICATIONS

This patent application is related to and claims priority
5 from U.S. Provisional Patent Application No. 60/208,482
(Attorney Docket No. 34013-00027USPL), filed June 2, 2000,
which is hereby incorporated by reference herein in its
entirety. This application is related to and claims priority
from U.S. Provisional Patent Application No. 60/208,478
10 (Attorney Docket No. 34012-00028USPL), filed June 2, 2000
which is incorporated by reference herein in its entirety.
This application incorporates by reference herein in its
entirety U.S. Patent Application entitled "Diffraction grating
for Wavelength Division Multiplexing/Demultiplexing Devices"
15 filed November 28, 2000.

FIELD OF THE INVENTION

The present invention relates generally to wavelength division multiplexing, and more particularly, to minimizing losses from thermal and pressure effects on wavelength
5 division multiplexing/demultiplexing devices.

BACKGROUND OF THE INVENTION

The telecommunications industry has grown significantly in recent years due to developments in technology, including the Internet, e-mail, cellular telephones, and fax machines.
10 These technologies have become affordable to the average consumer such that the volume of traffic on telecommunications networks has grown significantly. Furthermore, as the Internet has evolved, more sophisticated applications have increased data volume being communicated across
15 telecommunications networks.

To accommodate the increased data volume, the telecommunications network infrastructure has been evolving to increase the bandwidth of the telecommunications network. Fiber optic networks that carry wavelength division
20 multiplexed optical signals or channels provide for significantly increased data channels for the high volume of traffic. The wavelength division multiplexed optical channels

are comprised of narrow band or substantially monochromatic optical signals. The wavelength division multiplexed optical channels carry data packets containing information, including voice and data. Contemporary optical networks can include
5 forty or more substantially monochromatic optical channels on a single fiber and each substantially monochromatic optical channel can carry many thousands of simultaneous telephone conversations or data transmissions, for example.

An important component of the fiber optic networks is a
10 wavelength division multiplexer (WDM). A WDM is utilized to multiplex and demultiplex the wavelength division multiplexed optical signals to and from individual fibers in the fiber optic networks.

A WDM includes optical components that, in the case of
15 demultiplexing, separate polychromatic optical signals into individual substantially monochromatic optical signals, and, in the case of multiplexing, combine substantially monochromatic optical signals into polychromatic signals. The optical components of one type of WDM include lenses for
20 focusing and collimating the optical signals and a diffraction grating for diffracting the optical signals to perform the multiplexing and demultiplexing functions. Optionally, a prism is included. A diffraction grating component can comprise a moldable or castable material, such as epoxy, into

which the diffraction grating profile is pressed, an optical reflective coating, such as gold or aluminum, that is coated onto the material, and a substrate into which the material is attached. The grating substrate provides thermal stability to
5 maintain groove spacing of the diffraction grating. A support structure is used to either mount or house the optical components of the WDM.

Both the mechanical and optical components of the WDM are affected by changes in temperature. They expand and contract
10 changing in shape and relative position, and also changing in optical properties. While the WDM inherently has losses, the changes due to temperature and pressure variations increase the inherent losses and affect the ability of the WDM to effectively transmit an optical signal. It is desirable to
15 minimize the increase in losses, and therefore, there is a need for a WDM device that is pressure and/or thermally compensated, such as being abaric and/or athermal.

SUMMARY OF THE INVENTION

To overcome the adverse affects of changes in temperature
20 and/or pressure, a WDM has been designed to pressure and/or temperature compensate. The WDM has a structure for holding at least one optical component. A diffraction grating assembly having a substrate is held in relation to the at

least one optical component by the structure. A lens assembly having a focal length is held in relation to the at least one optical component. The coefficient of thermal expansion of the lens assembly and structure are approximately equal. The lens assembly is constructed from a material chosen to minimize its variance in focal length over temperature. The grating assembly has an angular dispersion that changes with temperature and the product of the focal length and angular dispersion remains constant over temperature. The WDM further comprises a prism having a change in index of refraction with temperature that is approximately equal to a negative of a coefficient of thermal expansion of the substrate. In the absence of a prism, the grating substrate has a coefficient of thermal expansion approximately equal to a negative of a coefficient of thermal expansion of air.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the system and method of the present invention may be obtained by reference to the following Detailed Description when taken in conjunction with the accompanying Drawings wherein:

FIG. 1 is a side elevational view of a wave division multiplexing/demultiplexing device according to an embodiment of the present invention;

FIG. 2 is a perspective view of a portion of the wave
5 division multiplexing/demultiplexing device of FIG. 1;

FIG. 3 is an end view of the portion of the wave division multiplexing/demultiplexing device of FIG. 1;

FIG. 4 illustrates a general construction of a diffraction grating assembly;

10 FIGS. 5A-5D illustrate multiplexing and demultiplexing functions of a wave division multiplexing/demultiplexing device;

FIG. 6 illustrates a pass band and central wavelength of a substantially monochromatic beam;

15 FIG. 7 illustrates the geometry of a prism; and

FIG. 8 is a block diagram of an optical communications system according to an embodiment of the present invention.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

20 The present invention will now be described more fully hereinafter with reference to the accompanying drawings in which a preferred embodiment of the invention is shown.

Optical networks are utilized to handle telecommunications traffic caused in part by the Internet,

mobile communications, and facsimile communications. To increase the bandwidth of optical networks, wavelength division multiplexers (WDM), including dense wavelength division multiplexers, have been developed to allow for multiple wavelengths of light, each containing a different data stream, to be carried by a single fiber optic line. WDM devices combine polychromatic optical signals into and separate polychromatic optical signals out from wavelength multiplexed fiber optic lines. Within one type of WDM, a diffraction grating is utilized to join a multiple number of substantially monochromatic optical signals from many fibers into a polychromatic optical signal on a single fiber in the multiplexing case, and separate a polychromatic optical signal from a single fiber into a multiple number of substantially monochromatic optical signals on multiple fibers in the demultiplexing case.

Referring to FIG. 1, there is shown a side view of a preferred embodiment of a wavelength division multiplexing/demultiplexing (WDM) device 10 in accordance with the present invention. The WDM device 10 comprises a plurality of first optical fibers 12, a corresponding plurality of first coupling components 14, a collimating/focusing lens 16 assembly, a prism 17, reflective diffraction grating assembly 11, a second coupling component

20, and a corresponding second optical fiber 22 shown in the multiplexing mode as indicated by the arrows representing the direction of the light. All of the above-identified components of the WDM device 10 are disposed along an optical
5 axis X-X of the WDM 10, as will be described in more detail below.

End portions of the plurality of first optical fibers 12 are grouped into a one-dimensional fiber array (i.e., a 1 x n array) by the first coupling components 14, while an end
10 portion of the single second optical fiber 22 is secured to the output fiber coupling component 20. Both the first coupling components 14 and the second coupling component 20 are used for purposes of optical fiber securement, ease of optical fiber handling and precision optical fiber placement
15 within WDM device 10. First and second coupling components may be, for example, a silicon V-groove assembly wherein the optical fibers 12 and 22 are sealed and aligned in V-shaped grooves formed in a silicon structure. Coupling components may also include patterned micro-optical components, known by
20 those skilled in the art, for passband shape modification.

Referring to FIG. 2, there is shown a perspective end view of a portion of the WDM device 10 revealing how the plurality of first optical fibers 12 are grouped into the one-dimensional fiber array (a 1 x 4 array) by the first coupling

components 14, and how the single second optical fiber 22 is secured to the second coupling component 20.

As shown in FIG. 3, the first coupling components 14 and the second coupling component 20 are disposed offset from, but symmetrically about, the optical axis X-X of the multiplexing device 10 so as to avoid signal interference between a polychromatic optical beam 26 appearing on or directed to second optical fiber 22 and a substantially monochromatic optical beam 24 appearing on or directed to any of the plurality of first optical fibers 12, or anywhere else. This offset spacing of the first coupling components 14 from the second coupling component 20 is determined based upon the characteristics of diffraction grating assembly 11, the wavelengths of each of the substantially monochromatic optical beams 24, and the focusing power of lens assembly 16.

Lens assembly 16 (FIG. 1) is adapted to collimate substantially monochromatic optical beams 24 incident thereon. Lens assembly 16 has a relatively high level of transmission efficiency. The lens assembly may include a plano-convex homogeneous refractive index collimating/focusing lens assembly. Each lens in the lens assembly 16 may utilize a refraction glass material having a high index of refraction to insure efficient optic beam transmissions. For example, a

preferred embodiment employs a triplet lens, as depicted in the FIG. 1.

Alternatively, the lens assembly 16 may include other lens types, lens numbers, lens configurations and lens compositions. In cases where diffraction grating assembly 11 is concave or otherwise non-planar, the use of lens assembly 16 within WDM device 10 may be unnecessary.

Lens assembly 16 can have telephoto characteristics, such as providing a telephoto lens assembly or a telephoto lens in the lens assembly. Use of a telephoto lens assembly 16 is advantageous, because lens assembly 16 can be smaller than would otherwise be required to achieve a given focal length. Thus, WDM 10 can be more compact.

A prism 17 may optionally be disposed between lens assembly 16 and diffraction grating assembly 11. Prism 17 bends optical signals from lens assembly 16 towards diffraction grating assembly 11. In doing so, prism 17 allows diffraction grating assembly 11 to be angularly disposed within a housing 18 of WDM device 10, as shown in FIG. 1. Prism 17 may be in direct contact with material 13 of diffraction grating assembly 11, or spaced therefrom. It is understood, however, that WDM device 10 may be utilized without prism 17.

Referring to FIG. 4, there is shown a cross-sectional view of a diffraction grating assembly 11 for use in the present invention. Diffraction grating assembly 11 is a reflective grating for reflecting optical and/or light rays 5 diffracted therefrom. The grating assembly 11 comprises a substrate 11(a) covered by a diffractive surface 11(b). The diffractive surface 11(b) may be metallic, for example, aluminum or gold. Optionally, an optically transmissive material or coating 13 covers diffractive surface 11(b).

10 Grating substrate 11(a) may be constructed from a number of different substances. For example, substrate 11(a) may be a glass, metal or ceramic compound. As seen in FIG. 4, substrate 11(a) may have a substantially planar shape. It is understood, however, that substrate 11(a) may alternately

15 include a substantially curved or concave surface (not shown) over which a diffraction grating surface is formed. Generally, as substrate 11(a) is a substantial portion of grating assembly 11, its thermal properties dominate.

The use of diffraction grating assembly 11 within WDM 20 device 10 can result in a high efficiency device for performing substantially apolarized multiplexing/demultiplexing operations providing the grating meets appropriate design parameters. The term "apolarized" is used herein as meaning a signal condition in which the power

of the transverse electric polarization state TE is equal to the power of the transverse magnetic polarization state TM at a pertinent wavelength or set of wavelengths. For instance, WDM device 10, in accordance with embodiments of the present invention, may achieve a polarization dependent loss of less than approximately 1 dB, and particularly less than 0.5 dB, with an insertion loss of less than 3 dB. With such high efficiency performance, the present WDM device 10 may be utilized as a passive device and in a substantially passive network. By eliminating the need for active components, WDM device 10 of the embodiments of the present invention thereby reduces power and conserves energy.

It is understood that although diffraction grating assembly 11 may be associated with and/or included in passive devices and networks, it is understood that diffraction grating assembly 11 may be utilized in devices and networks having active components which may perform one or more of a variety of active functions, including optical amplification.

Referring again to FIG. 1, diffraction grating assembly 11, prism 17, lens assembly 16, and coupling components 14 and 20 with their respective fibers 12 and 22 are held in relation along axis X-X by a housing 18. In the preferred embodiment, housing 18 can be tubular and is sized to closely receive grating assembly 11, prism 17, and lens assembly 16. It will

be readily appreciated that housing 18 can be any other shape or structure which conveniently holds the components. It will also be appreciated that housing 18 could alternately be a flat plate which supports the components.

5 The operation of WDM device 10 will be described with reference to FIGS. 5A-5D. As mentioned above, WDM device 10 is capable of performing both multiplexing and demultiplexing functions. In the context of a multiplexing function, reference is made to FIGS. 5A and 5B.

10 In performing a multiplexing function, WDM device 10 generally receives a plurality of individual substantially monochromatic input signals collectively referred to as beams 24 at different wavelengths ($\lambda_1, \lambda_2, \lambda_3 \dots \lambda_n$) and combines such signals to generate a polychromatic output signal or beam
15 26. Each of the plurality of substantially monochromatic optical input beams 24 are transmitted along and emitted from a corresponding first optical fiber 12 into the air space between the first coupling components 14 and lens assembly 16. Within this air space, the plurality of substantially
20 monochromatic optical input beams 24 are expanded in diameter (best seen in FIG. 2) until they become incident upon the lens assembly 16. The lens assembly 16 collimates each of the plurality of substantially monochromatic optical input beams 24 (FIG. 5A), and transmits each collimated, substantially

monochromatic optical input beam 24' to the diffraction grating assembly 11.

Referring to FIG. 5B, diffraction grating assembly 11 operates to angularly reflect the plurality of substantially monochromatic optical input beams 24' in Littrow and near-Littrow condition back towards lens assembly 16, generally shown as reflected beams 24''. In doing so, the diffraction grating assembly 11 removes the angular separation of the plurality of collimated, substantially monochromatic optical input beams 24''. The Littrow condition is when the angle of incidence is equal to the reflected angle, and diffraction grating assembly 11 is angularly disposed so that at least one wavelength in a predetermined operating range of wavelengths (such as the C or L band) is in Littrow condition. Because beams 24' are incident on grating assembly 11 at different angles, only one is reflected in true Littrow condition. The others are reflected in near-Littrow condition. Lens assembly 16 focuses the reflected beams 24'' towards second coupling component 20. The focused reflected beams 24'' become incident upon the single second optical fiber 22 and combine in a multiplexed polychromatic optical output signal 26 at second coupling component 20. The single collimated, polychromatic optical output beam 26 contains each of the unique wavelengths of the plurality of the substantially

monochromatic reflected beams 24''. The single multiplexed, polychromatic optical output beam 26 is then coupled into the single second optical fiber 22 for transmission therethrough.

In the context of performing a demultiplexing operation, the operation of WDM device 10 will be described with reference to FIGS. 5C and 5D. In performing a demultiplexing function, WDM device 10 generally receives a single polychromatic input signal or beam 26 and generates a plurality of individual substantially monochromatic signals or beams 24 at different wavelengths from the single polychromatic input signal 26.

A single polychromatic optical input beam 26 is transmitted along and emitted from second optical fiber 22 into the air space between the second coupling component 20 and the lens assembly 16. Within this air space, the polychromatic optical input beam 26 is expanded in diameter (best seen in FIG. 2) until it becomes incident upon the lens assembly 16. The lens assembly 16 collimates the polychromatic optical input beam 26 towards diffraction grating assembly 11 as polychromatic optical beam 26' (FIG. 5C).

As stated above, diffraction grating assembly 11 operates to angularly diffract the polychromatic optical beam 26' into a plurality of substantially monochromatic optical beams 24,

with each reflected substantially monochromatic beam 24 being diffracted at a distinct angle, relative to diffraction grating assembly 11, by an amount that is dependent upon the wavelength of the reflected substantially monochromatic beam

5 24. As shown in FIG. 5D, the diffraction grating assembly 11 reflects the substantially monochromatic signals 24 back towards the lens assembly 16. The lens assembly 16 focuses the plurality of substantially monochromatic optical input beams 24, and then transmits each collimated, substantially

10 monochromatic optical beam 24' to the corresponding first coupling component 14 and corresponding first optical fiber 12. Each substantially monochromatic optical beam 24' becomes incident upon a corresponding first optical fiber 12. At this point, the substantially monochromatic signals 24' are then

15 coupled to the first optical fibers 12 for transmission therethrough.

Both the mechanical and optical components of WDM 10 are affected by changes in temperature. The materials expand and contract changing the shape and relative position of

20 components and changing optical properties of the system. This negatively impacts the ability of WDM 10 to efficiently transmit an optical signal, because it changes the intended path and focus of beams 24 and 26. Therefore, to minimize the

insertion losses and maintain the efficiency of WDM 10, the thermal effects on components within WDM 10 are balanced.

To achieve maximum efficiency, polychromatic beam 26 should be focused and centered on the end of fiber 22 when
5 multiplexing with WDM 10. When demultiplexing, each substantially monochromatic beam 24 is focused and centered on the end of its respective corresponding fiber 12. The distance between each beam 24 as it is projected on the end of its respective corresponding fiber 12 is herein referred to as
10 "lateral spot separation". Thus, to be centered on fibers 12, the lateral spot separation of beams 24 must match the spacing of fibers 12.

Lens assembly 16 expands and contracts with temperature changing its optical properties. The index of refraction, and
15 thus focal length, changes with temperature, tending to shift the focus, or focal plane, axially and substantially parallel to X-X away from the fiber ends 12. Also, as the index of refraction changes, the magnification of beams 24 changes, affecting the spot separation. As the magnification
20 increases, the spot separation increases, causing beams 24 to deviate laterally (lateral expansion) from the ends of fibers 12. As the magnification decreases, the spot separation decreases, also causing deviations (lateral contraction).

The change in optical properties of lens assembly 16 is compounded by the dimensional change of housing 18 with temperature. Housing 18 expands and contracts along axis X-X with temperature, which changes the relative distance between
5 the fiber 12 ends and lens assembly 16. This has the same effect as changing the index of refraction of lens assembly 16, because it moves the fiber 12 ends and axially from the focal plane. Also, in WDM 10, couplings 14 and 20 expand and contract with temperature moving the fiber ends axially.

10 In addition, substrate 11(a) of grating assembly 11 expands and contracts with changes in temperature and affects the lateral spot separation and position. Also, the index of refraction of the air (n_a) between grating assembly 11 and lens assembly 16, and index of refraction of prism 17 (n_p), if
15 included, changes with temperature. This too, affects the lateral spot separation and position. As substrate 11(a) expands, the spacing of diffraction surfaces, or grating period (D), increases. As the grating period (D) increases, the angle between diffracted substantially monochromatic beams
20 24, or angular dispersion, decreases. This can also be quantified in terms of linear dispersion, which is the product of angular dispersion and focal length. As the angular and thus linear dispersion decreases, the lateral spot separation decreases deviating from the ends of fibers 12 and increasing

losses. Regarding position, the position of the entire ensemble of diffracted beams 24 shifts with changes in grating period (D). This also moves beams 24 from the ends of fibers 12 and increases losses.

5 Concerning the thermal effects on lens assembly 16, the change of refractive index can be quantified in terms of change in optical power with temperature. In an embodiment of lens assembly 16 having a single thin lens element of optical power (ϕ), the change in power with temperature (t) is given
10 by:

$$\frac{d\phi}{dt} = \phi \left[\frac{\frac{dn}{dt}}{n-1} - CTE_L \right] = \phi T \quad (1)$$

where CTE_L is the coefficient of thermal expansion of the lens material and n is the refractive index of the lens in lens assembly 16.

15 The analysis can be applied to embodiments of lens assembly 16 having multiple lens elements. For a system of two lenses with separation d, the total optical power (ϕ_T) is given by:

$$\phi_T = \phi_1 + \phi_2 - d\phi_1\phi_2 \quad (2)$$

Accounting for change in temperature, equation 2 becomes:

$$\frac{d\phi_T}{dt} = \left[T_1\phi_1 + T_2\phi_2 - d(CTE_D)T_1\phi_1T_2\phi_2 \right] \Delta t \quad (3)$$

where CTE_D is the coefficient of thermal expansion of a spacer element (not shown) between lens elements, and where T is the
5 quantity in brackets in equation (1). One skilled in the art will understand that this analysis can be expanded to apply to additional thin lenses.

The material of lens assembly 16 is chosen with a relatively low change in refractive index with temperature
10 (dn/dt) , herein also referred to as coefficient of refractive index change, to minimize movement in focal image with temperature. It has been found that materials with an absolute change in refractive index with temperature (dn/dt) preferably between 0 and -2.5 PPM per °C, yield the best
15 results. Suitable materials can be purchased from Schott Glass, Inc. as product numbers SFL6 or SFL56, FK3, FK5, N-SF8, N-SF10, BAF50, LaF3, and LaF2, SF64A, K7 and LF5. This list is merely exemplary, and by no means is exhaustive. It will be understood that glasses from other suppliers having similar
20 properties are suitable for lens assembly 16.

In addition to choosing a lens material having a low change in refractive index with temperature, the material of

housing 18 and lens assembly 16 are chosen so that the expansion or contraction of housing 18 compensates as much as possible for axial shift in focal plane. In other words, a length of housing 18 between lens assembly 16 and fiber 12
5 ends changes substantially the same amount as the change in focal position of lens assembly 16 with temperature. Expressed mathematically:

$$CTE_M L \cong \Delta z \quad (4)$$

where CTE_M is the expansion coefficient of housing 18, L is
10 the length housing 18 between lens assembly 16 and fiber 12 ends, and Δz is the axial change in position of the focal plane image. For a single lens:

$$\Delta z = \frac{1}{T\phi} \quad (5)$$

One skilled in the art will understand that this can be
15 expanded to apply to multiple lens systems by applying the same analysis as applied above.

The expansion coefficient of the material used in housing 18 yields the best results when the expansion coefficient is equal or almost equal preferably within 3 PPM/°C, to the
20 coefficient of thermal expansion of lens assembly 16. Since

most suitable materials for housing 18 will have a positive expansion coefficient, it is preferred that the value of the change in refractive index with temperature of lens assembly 16 be negative, so that its focal length will increase with temperature to compensate for increases in length of housing 18. By minimizing the change in index of refraction with temperature as described above and further compensating for axial shift in focal plane with housing 18, the axial shift in focal plane as seen by the fiber 12 ends can be as low as 0.01% of the focal length over a temperature range of 90°C. An axial shift in focal length of 6 μ m of a focal length of 84mm over a temperature range of -20°C to 70°C has been achieved. Suitable materials for use with the above mentioned lens glass types include titanium, titanium alloys, and martensitic stainless steel, such as AISI 410, 416, 420, and 440 series. It will be understood that materials having similar properties are suitable for housing 18, and that for different lens assembly 16 materials, different housing 18 materials may be suitable.

Concerning the thermal effects on grating assembly 11, the dispersive properties of grating 1 change as substrate 11(a) expands and contracts with temperature and increase losses in two ways. First, as substrate 11(a) expands and contracts, the angular dispersion, and thus linear dispersion,

of reflected substantially monochromatic beams 24 changes
affecting the lateral spot separation. Second, the change in
dispersion affects the central wavelength position of the
substantially monochromatic beams 24 transmitted to fibers 12,
5 shifting the ensemble's position with respect to the fiber 12
positions.

Angular dispersion at Littrow can be derived from the
grating equation. The grating equation at Littrow is:

$$\sin(\theta) = \frac{m\lambda}{2n_c D} \quad (6A)$$

10 where m is the diffraction order of the grating, n_c is the
refractive index of coating 13, D is the grating period, and
 θ is the Littrow angle of the diffraction grating. In more
general terms, equation 6A can be expressed as:

$$\sin(\theta_d) = \frac{m\lambda}{n_c D} - \sin(\theta_i) \quad (6B)$$

15 where θ_d is the angle from a perpendicular to the grating
surface at which beams 24 are diffracted and θ_i is the angle
from perpendicular at which beam 26 is incident upon the
grating surface. Taking the derivative of equation 6A with

respect to wavelength λ , yields the angular dispersion at Littrow:

$$\frac{d\angle}{d\lambda} = \frac{m}{2n_c D \cos(\theta)} \quad (7)$$

where $d\angle/d\lambda$ is the angular dispersion in radians per wavelength. As described above, D changes with temperature as substrate 11(a) expands and contracts, and thus the angular dispersion changes.

Linear dispersion is the product of the angular dispersion and effective focal length, and focal length is the inverse optical power, hence:

$$LD = \frac{\frac{d\angle}{d\lambda}}{\phi_T} \quad (8)$$

Therefore, linear dispersion and, correspondingly, lateral spot separation and position changes with temperature.

To minimize changes in lateral spot separation and linear dispersion resulting from geometrical changes in substrate 11(a), lens assembly 16 is configured to substantially compensate, and hold linear dispersion substantially constant, with its change in focal length. Thus, when temperature

decreases angular dispersion of grating assembly 11 increases, focal length of lens assembly 16 decreases accordingly, and as angular dispersion decreases, focal length increases to keep linear dispersion substantially constant.

5 The thermal effects on grating substrate 11(a) also increase losses by causing substantially monochromatic beams 24 to shift from their intended positions on fiber ends 12. Referring to FIG. 6, in practice, beams 24 are not truly monochromatic, but rather a tight range of wavelengths about
10 a center frequency. Each beam 24 has a central wavelength 32 which is the representative wavelength to which an optical signal is associated. Each central wavelength 32 is generally predefined, and may correspond with an industry standard, such as the standards set by the International Telecommunication
15 Union. As temperature changes the dispersion of grating assembly 11, beam 24 is no longer diffracted at the nominal angle (per equation 6B), and the central wavelength of beams 24 deviates from fiber 12 ends.

 The index of refraction of prism 17, or the air between
20 lens assembly 16 and grating assembly 11 if no prism 17 is present, changes with temperature. This can be balanced with the thermal effects of grating substrate 11(a). The change with temperature of the angular deviation of a beam incident

on grating assembly 11 through a prism 17 can be approximated near Littrow by:

$$\frac{d\Delta}{dt} \approx \frac{-m\lambda}{\left[2n_p D [1 + (G + C)\Delta t]^2\right]} (G + C) \quad (9)$$

where G is the change in refractive index of the prism (n_p) over temperature range Δt , C is the product of the grating substrate 11(a) coefficient of thermal expansion and Δt , and n_p is the index of refraction of the prism.

To minimize the thermal effects of substrate 11(a), materials of prism 17 and diffraction grating substrate 11(a) are chosen so that the change in refractive index of prism 17 with temperature and the coefficient of thermal expansion of grating substrate 11(a) sum close to zero. This minimizes the angular deviation of beams 24 with temperature, and thus minimizes the shift in center channel wavelength.

It has been found that by choosing the material of prism 17 to have a negative change in index of refraction with increasing temperature approximately equal to the positive coefficient of thermal expansion of grating substrate 11(a), and preferably within a magnitude within 30% of the coefficient of thermal expansion of substrate 11(a), the best results are achieved.

When no prism 17 is used, a change in index of refraction of air with temperature is balanced with the expansion and contraction of substrate 11(a). The substrate material is chosen such that its coefficient of thermal expansion and the change in index of refraction of air with temperature sum close to zero. In an ideal case, substrate 11(a) has a coefficient of thermal expansion equal to a negative of the change in index of refraction of air. It has been found that by choosing the material of substrate 11(a) to have a coefficient of thermal expansion between 0.5 PPM/°C and 1.5 PPM/°C, best results are achieved.

Variations in pressure can increase the insertion losses of WDM 10 much in the same way as the changes in temperature discussed above by causing variations in the path of beams 24 and 26. The most notable effect is the change in index of refraction of air, especially air between grating assembly 11 and lens assembly 16, with pressure. As pressure varies, the refractive index of air varies causing a shift in the center channel wavelength and shift from Littrow and near-Littrow condition. Prismic triangular regions of air within WDM 10 act as "air prisms" to refract beams 24 and 26. As pressure varies, the refractive index of air changes and affects how beams 24 and 26 are refracted, thus causing lateral shifts in the position of the center channel wavelength on fiber ends

12. This affects WDM 10 as the atmospheric pressure changes due to changes in the weather, or WDM 10 is moved between locations of varying altitude.

Referring to FIG. 7, a prism or prisms 17 may be provided which form a prismic region of air 34, between prism 17 and lens assembly 16 that substantially balances the refraction of a corresponding prismic region of air 36 between prism 17 and diffraction grating 11. An angle (θ_a) of air prism 34, measured between prism 17 and a perpendicular to an incident beam 26 or 24, is approximately equal to an angle (θ_b) of air prism 36, measured between prism 17 and grating assembly 11. However, angles θ_a and θ_b are directed in opposite directions, so that air prisms 34 and 36 are opposed as depicted in FIG 7. This forms opposing air prisms 34 and 36, in which the refraction of one balances the refraction of the other. As pressure changes the index of refraction of the air, the change in refraction of one air prism 34 balances the change in refraction of the other 36.

Prism 17 can also be configured to create anamorphic beam compression of monochromatic beams 24 toward fiber ends 12. The anamorphic beam compression decreases the diameter of beams 24, and thus increases the angular deviation between beams. This increased angular deviation creates additional beam separation at fiber ends 12 for a given structure 18

length. Thus, a desired beam separation can be achieved in a shorter overall length of WDM 10, enabling WDM 10 to be compact.

Referring to FIG. 7, the anamorphic beam compression is accomplished by providing a prism 17 or prisms configured to maximize the compression. The angular magnification factor is given by:

$$M = \frac{\sqrt{1 - \left(\frac{n_a}{n_p} \sin(\theta_1)\right)^2}}{\cos(\theta_1)} \quad (10)$$

where n_a is the index of refraction of air and θ_1 is the front prism angle. Thus, θ_1 and n_p are optimized, taking into account other factors discussed above, to maximize the anamorphic beam compression.

FIG. 8 is a block diagram of a fiber optic network 100 in accordance with an embodiment of the present invention. The fiber optic network 100 provides optical communication between end points 105a, 105b, and 105c. Each end point 105a, 105b, and 105c is coupled to a WDM 110a, 110b, and 110c, respectively, either optically or electrically. In the case of an optical coupling, each end point 105a and 105c communicates a multiple number of substantially monochromatic

optical signals via fiber optic lines 112a-112n to the associated WDM 110a-110c, respectively. The end point 105b communicates a multiple number of substantially monochromatic optical signals via fiber optic lines 114a-114d to/from WDM 110b, which multiplexes the substantially monochromatic optical signals 114b, 114d to WDM 110d along fiber optic line 116.

The WDMs 110a and 110c are coupled via a wavelength add/drop device 120 between the fiber optic lines 122a and 122c, respectively. The wavelength add/drop device 120 is, in general terms, a simple form of a wavelength router with two input/output (I/O) ports and an additional third port wherein substantially monochromatic optical signals are added to/dropped from the incoming polychromatic optical signal appearing at either I/O port. Within the wavelength add/drop device 120, a pair of WDMs 130a-130b are utilized to separate a received polychromatic optical signal into a plurality of substantially monochromatic optical signals and communicate one or more of the substantially monochromatic optical signals to end point 105b, via the WDM 110d.

Optical performance monitor (OPM) 135 is further coupled to fiber optic lines 122a and 122c. Alternatively, the OPM 135 may be coupled to an individual fiber optic line. A polychromatic optical signal being monitored is tapped or

extracted from the fiber optic line 122a, for example, via a beam splitter 140a, as is well known in the art. Because the WDM devices according to the principles of the present invention have a low polarization-dependent loss (PDL) and are substantially apolarizing, the beam splitter 140a may tap as little as 1% or less of the power of the monitored polychromatic signal to allow the OPM 135 to properly operate and provide the operator of the fiber optic network 100 valuable operating information, without substantially affecting the power level of the monitored polychromatic signal.

It is understood that beam splitter 140b may be utilized to tap a polychromatic signal appearing on fiber optic line 122c, and provide the tapped polychromatic signal to WDM 140.

As an example of how the fiber optic network 100 operates, the end point 105a may be located in Boston, the end point 105b may be located in Hartford, and the end point 105c may be located in New York City. A network service provider in Boston receives communication signals from local towns or cities via a communication system, such as a standard telephone network. The communication signals, which are destined to locations south of Boston (i.e., Hartford and New York City), are time-division multiplexed onto substantially monochromatic optical signals and delivered to the WDM 110a.

In addition, local communication signals originating from Hartford may be added to either WDM 130a or 130b to be transmitted to either Boston or New York City, respectively, based upon the optical frequency that the communication signals are placed. The substantially monochromatic optical signals are multiplexed by WDM 130b into a polychromatic optical signal and demultiplexed by WDM 110c in New York City. It should be understood that the fiber optic lines (e.g., 112a, 122a, 116, 122c) are bidirectional such that optical

5 The present invention is not to be limited in scope by
the specific embodiments described herein. Indeed, various
modifications of the present invention, in addition to those
described herein, will be apparent to those of skill in the
art from the foregoing description and accompanying drawings.
10 Thus, such modifications are intended to fall within the scope
of the appended claims.

What is claimed is:

1. A WDM comprising:

a structure extending longitudinally from one end to another for supporting components of the WDM;

5 at least two optical components supported at the one end of the structure for transmitting and receiving optical signals;

a diffraction grating supported at the other end of the structure for diffracting the optical signals from the optical
10 components;

a lens assembly supported by the structure and disposed between the optical components and the diffraction grating, the lens having a focal length for focusing the optical signals in relation to the optical components; and

15 wherein the coefficient of thermal expansion of the diffraction grating is a value chosen to be approximately equal to a negative of the change of index of refraction with temperature of air.

2. The WDM of claim 1 wherein the structure has a first
20 coefficient of thermal expansion and the lens assembly has a second coefficient of thermal expansion, and wherein the first and second coefficients of thermal expansion are approximately equal.

3. The WDM of claim 1 wherein the structure has a coefficient of thermal expansion within 3 PPM/degree Celsius of a coefficient of thermal expansion of the lens assembly.

4. The WDM of claim 1 wherein the lens assembly is constructed of a material chosen to minimize its variance in focal length over temperature.

5. The WDM of claim 1 wherein the lens assembly has a change of index of refraction with temperature from 0 to -2.5 PPM/degree Celsius.

6. The WDM of claim 1 wherein the diffraction grating has a coefficient of thermal expansion of 0.5 PPM/degree Celsius to 1.5 PPM/degree Celsius.

7. The WDM of claim 1 wherein a coefficient of thermal expansion of the structure and the change in index of refraction with temperature of the lens are values selected so that the length of the structure changes proportionally with the focal length of the lens in response to temperature changes in the structure and lens, whereby the lens remains substantially focused in relation to the optical components.

8. An optical network having a wavelength division multiplexer/demultiplexer (WDM) comprising:

a structure extending longitudinally from one end to another for supporting components of the WDM;

5 at least two optical components supported at the one end of the structure for transmitting and receiving optical signals;

a diffraction grating supported at the other end of the structure for diffracting the optical signals from the optical
10 components;

a lens assembly supported by the structure and disposed between the optical components and the diffraction grating, the lens having a focal length for focusing the optical signals in relation to the optical components; and

15 wherein the coefficient of thermal expansion of the diffraction grating is a value chosen to be approximately equal to a negative of the change of index of refraction with temperature of air.

9. The optical network of claim 8 wherein the structure has
20 a first coefficient of thermal expansion and the lens assembly has a second coefficient of thermal expansion, and wherein the

first and second coefficients of thermal expansion are approximately equal.

10. The optical network of claim 8 wherein the structure has a coefficient of thermal expansion within 3 PPM/degree Celsius
5 of a coefficient of thermal expansion of the lens assembly.

11. The optical network of claim 8 wherein the lens assembly is constructed of a material chosen to minimize its variance in focal length over temperature.

12. The optical network of claim 8 wherein the lens assembly
10 has a change of index of refraction with temperature from 0 to -2.5 PPM/degree Celsius.

13. The optical network of claim 8 wherein the diffraction grating has a coefficient of thermal expansion of 0.5 PPM/degree Celsius to 1.5 PPM/degree Celsius.

15 14. The optical network of claim 8 wherein a coefficient of thermal expansion of the structure and the change in index of refraction with temperature of the lens are values selected so that the length of the structure changes proportionally with

	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440	2441	2442	2443	2444	2445	2446	2447	2448	2449	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

Dallas2 732148 v 2, 34013 00048

ABSTRACT OF THE DISCLOSURE

A wavelength division multiplexer/demultiplexer (WDM) for use in an optical network and in an optical performance monitor that minimizes increases in insertion losses over temperature variations. The WDM has a structure for holding at least one optical component. A diffraction grating assembly having a substrate is held in relation to the at least one optical component by the structure. A lens assembly having a focal length is held in relation to the at least one optical component. The coefficient of thermal expansion of the lens assembly and structure are approximately equal. The lens assembly is constructed from a material chosen to minimize its variance in focal length over temperature. The grating assembly has an angular dispersion that changes with temperature and the product of the focal length and angular dispersion remains constant over temperature. The WDM further comprises a prism having a change in index of refraction with temperature that is approximately equal to a negative of a coefficient of thermal expansion of the substrate. The substrate has a coefficient of thermal expansion approximately equal to a negative of a coefficient of thermal expansion of air.

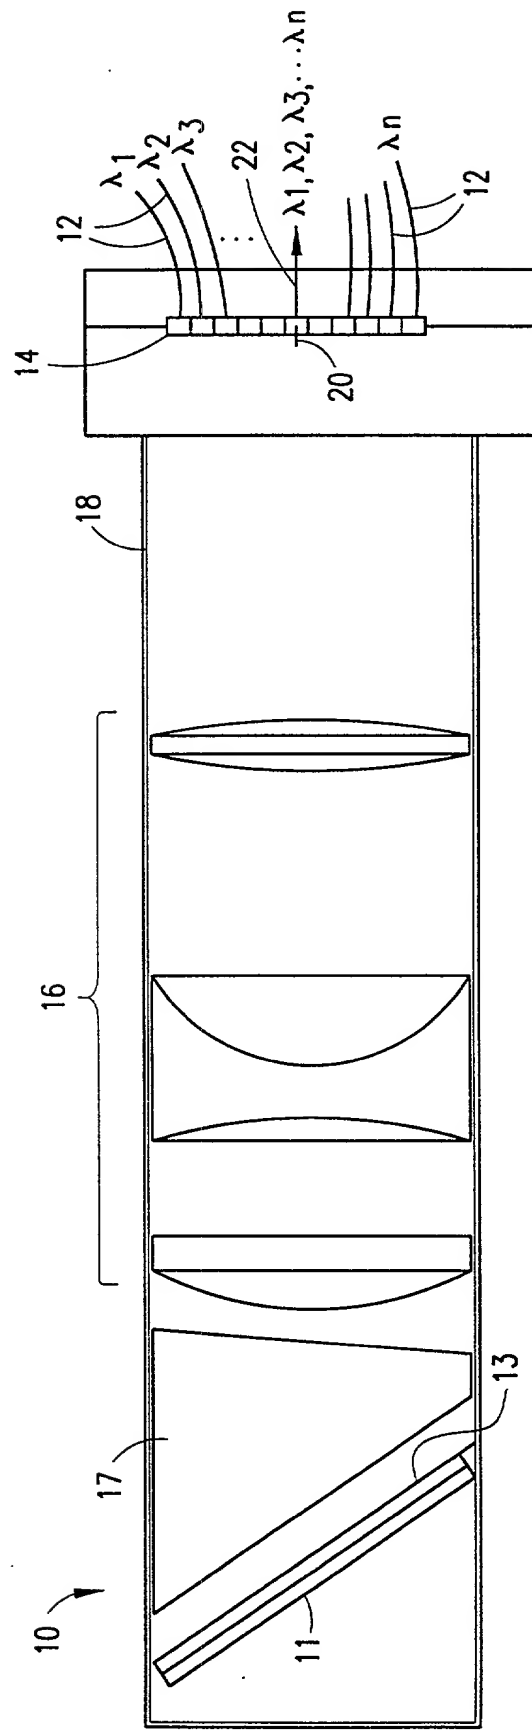


FIG. 1

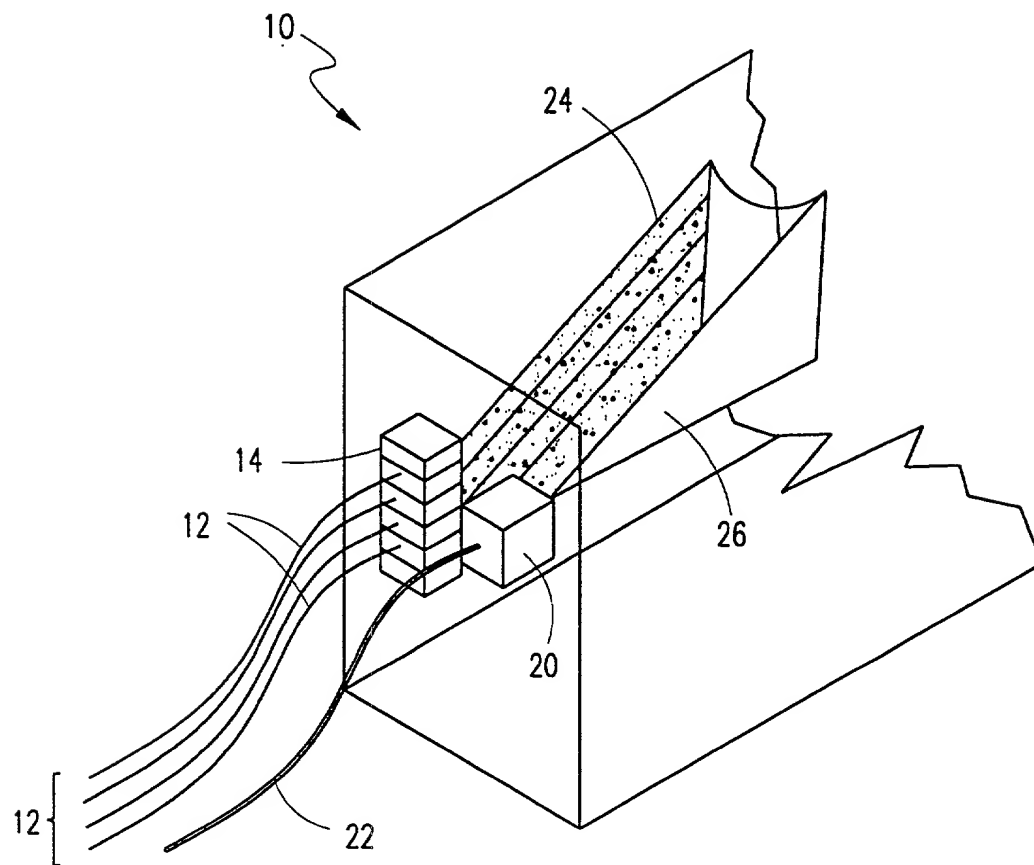


FIG. 2

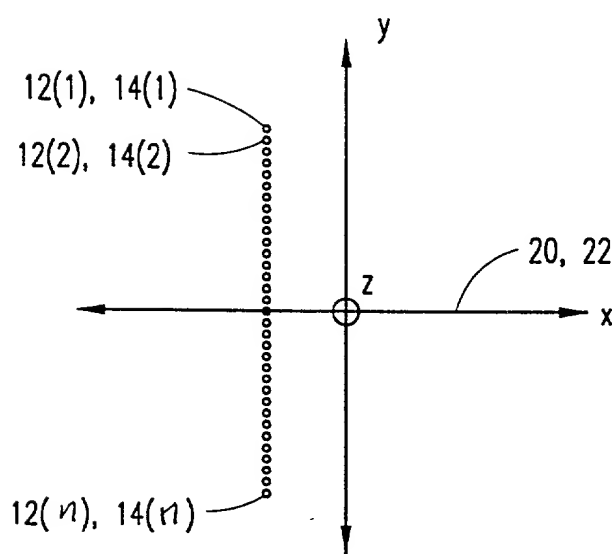


FIG. 3

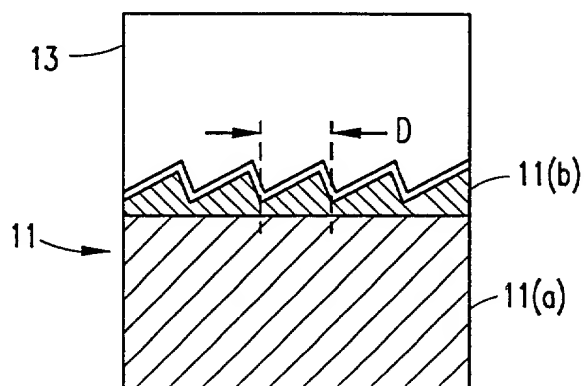


FIG. 4

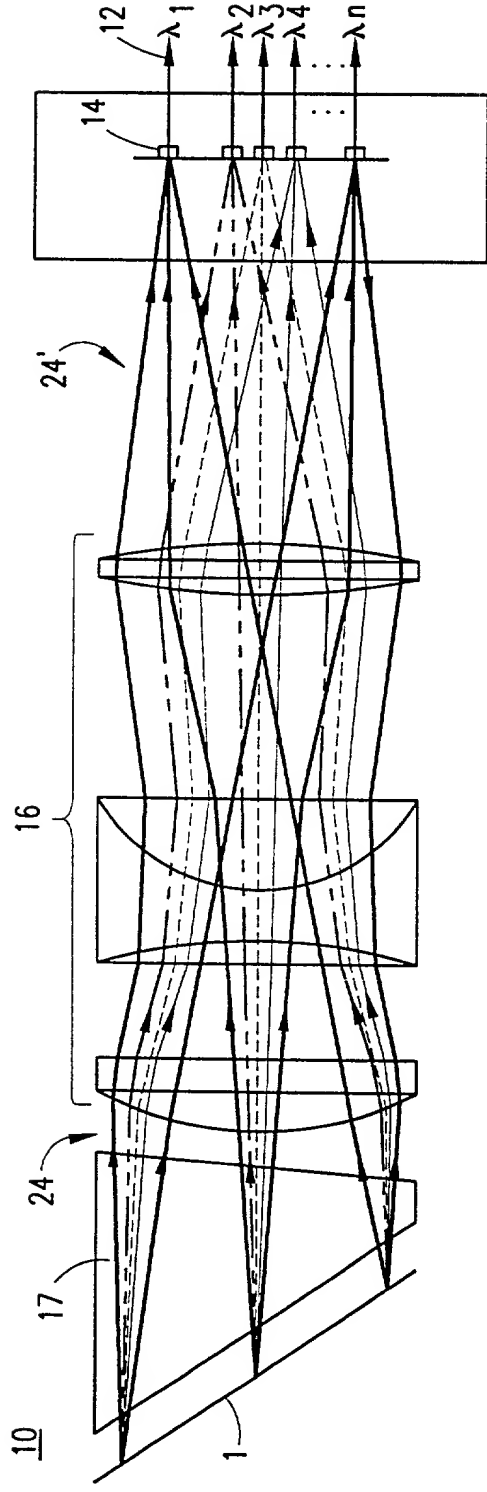


FIG. 5D

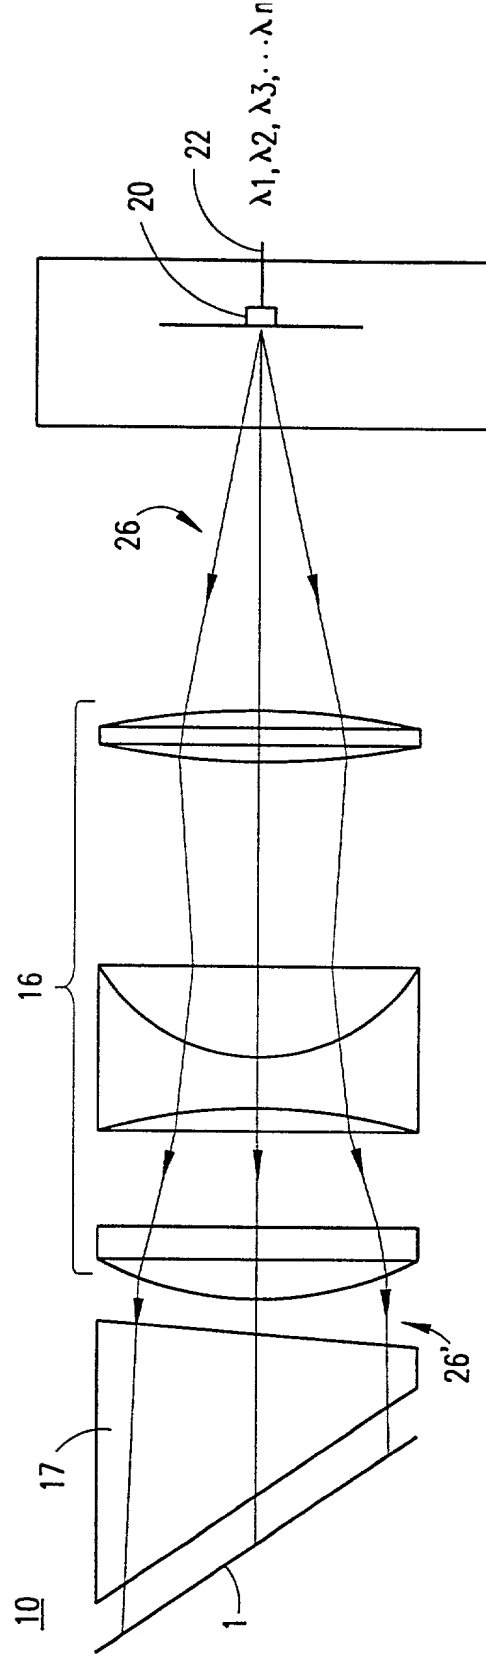


FIG. 5C

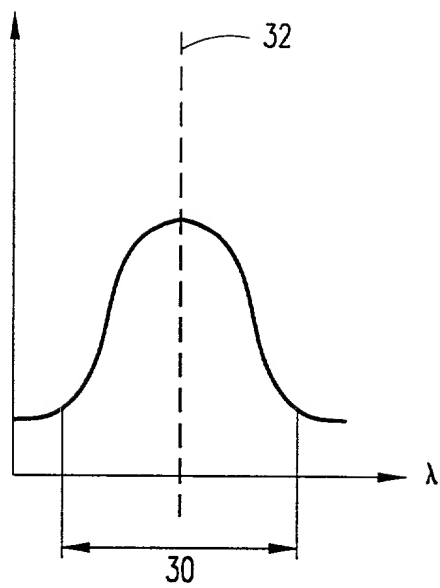


FIG. 6

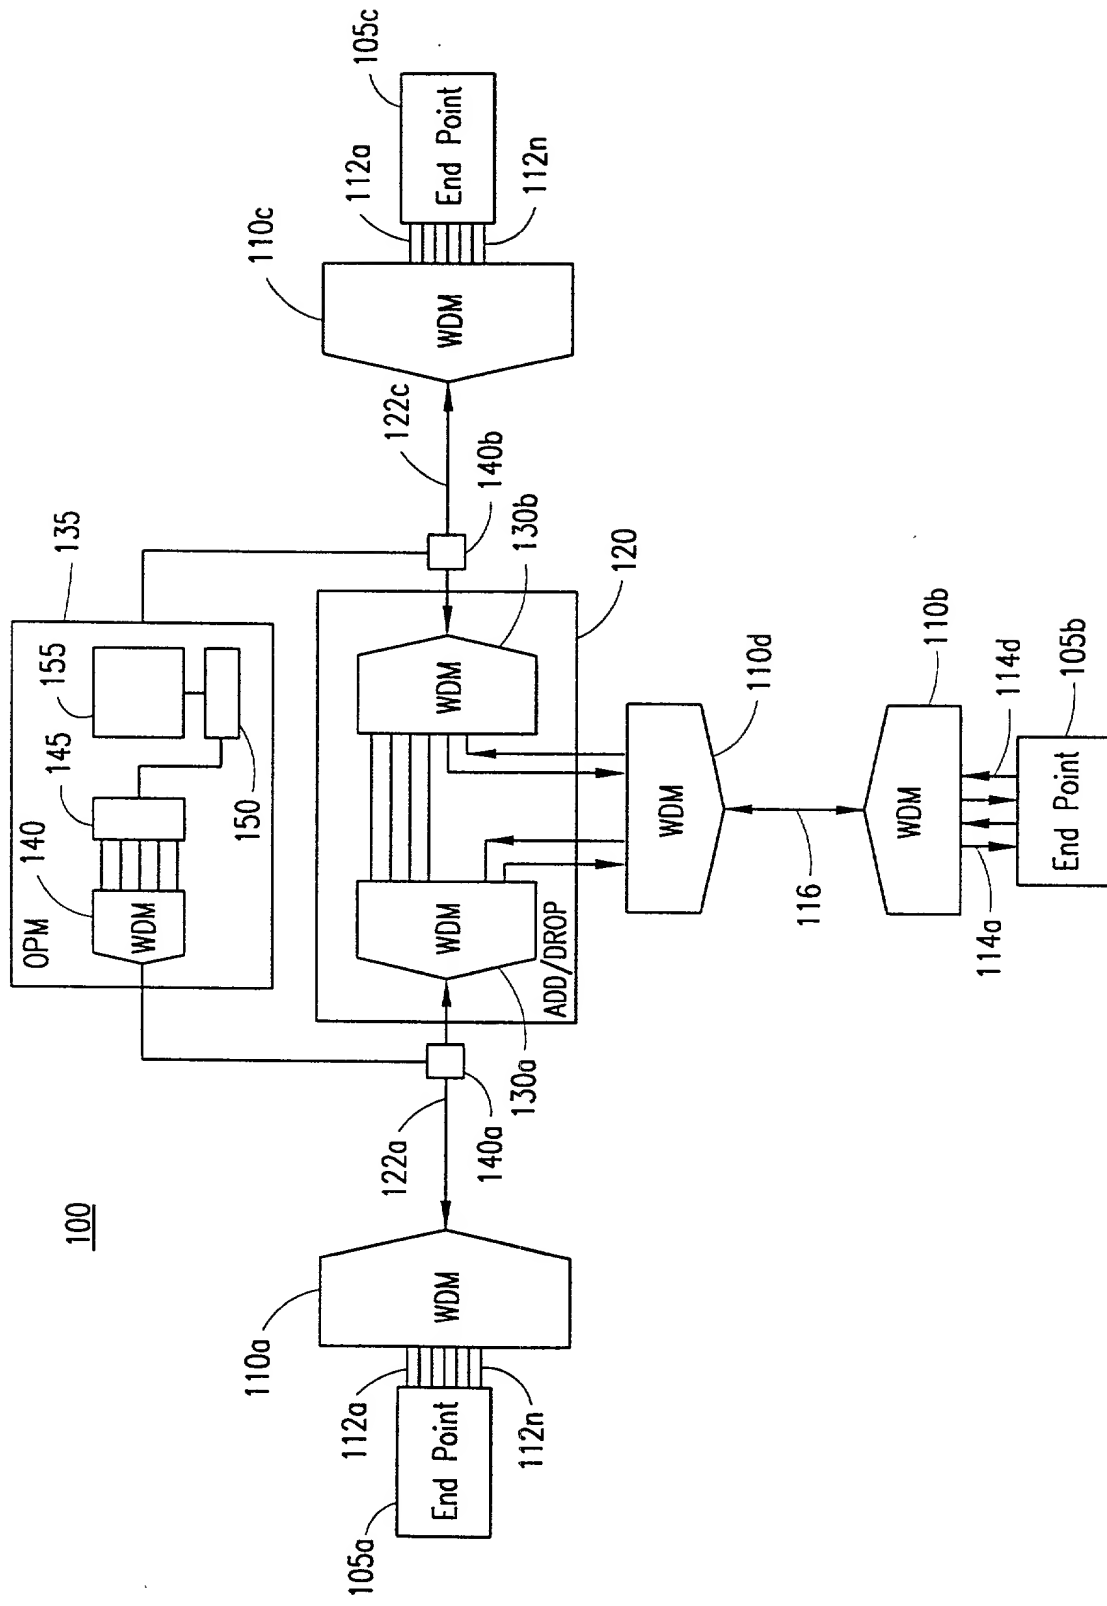


FIG. 8

**RULES 63 AND 67 (37 C.F.R. 1.63 and 1.67)
DECLARATION AND POWER OF ATTORNEY**

FOR UTILITY/DESIGN/CIP/PCT NATIONAL APPLICATIONS

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **ATHERMALIZATION AND PRESSURE DESENSITIZATION OF DIFFRACTION GRATING BASED WDM DEVICES**, the specification of which: (mark only one)

- ☒ (a) is attached hereto.
☐ (b) was filed on Herewith as Application Serial No. and was amended on (if applicable)
☐ (c) was filed as PCT International Application No. PCT/ on and was amended on (if applicable).
☐ (d) was filed on as Application Serial No. and was issued a Notice of Allowance on .
☐ (e) was filed on and bearing attorney docket number

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above or as allowed as indicated above.

I acknowledge the duty to disclose all information known to me to be material to the patentability of this application as defined in 37 CFR § 1.56. If this is a continuation-in-part (CIP) application, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability of the application as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

I hereby claim foreign priority benefits under 35 U.S.C. § 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me or my assignee disclosing the subject matter claimed in this application and having a filing date (1) before that of the application on which my priority is claimed or, (2) if no priority is claimed, before the filing date of this application:

PRIOR FOREIGN PATENTS

<u>Number</u>	<u>Country</u>	<u>Month/Day/Year</u> <u>Filed</u>	<u>Date first</u> <u>laid-open or</u> <u>Published</u>	<u>Date</u> <u>patented or</u> <u>Granted</u>	<u>Priority Claimed</u> <u>Yes</u>	<u>No</u>
NONE						

I hereby claim the benefit under 35 U.S.C. § 120/365 and also § 119/365 of any United States application(s) listed below and PCT international applications listed above or below:

PRIOR U.S. OR PCT APPLICATIONS

<u>Application No. (series code/serial no.)</u>	<u>Month/Day/Year Filed</u>	<u>Status(pending, abandoned, patented)</u>
60/208,482	6/02/00	Pending
60/208,478	6/02/00	Pending

I hereby appoint:

TIMOTHY G. ACKERMANN, Reg. No. 44,493
BENJAMIN J. BAL, Reg. No. 43,481
MICHAEL J. BLANKSTEIN, Reg. No. 37,097
MARY JO BOLDINGH, Reg. No. 34,713
MARGARET A. BOULWARE, Reg. No. 28,708
ARTHUR J. BRADY, Reg. No. 42,356
MATTHEW O. BRADY, Reg. No. 44,554
DANIEL J. BURNHAM, Reg. No. 39,618
THOMAS L. CANTRELL, Reg. No. 20,849
RONALD B. COOLLEY, Reg. No. 27,187
THOMAS L. CRISMAN, Reg. No. 24,846
STUART D. DWORK, Reg. No. 31,103
WILLIAM F. ESSER, Reg. No. 38,053
ROGER J. FRENCH, Reg. No. 27,786
JANET M. GARETTO, Reg. No. 42,568
JOHN C. GATZ, Reg. No. 41,774
RUSSELL J. GENET, Reg. No. 42,571
GERALD H. GLANZMAN, Reg. No. 25,035

J. KEVIN GRAY, Reg. No. 37,141
STEVEN R. GREENFIELD, Reg. No. 38,166
JOSHUA A. GRISWOLD, Reg. No. 46,310
J. PAT HEPTIG, Reg. No. 40,643
SHARON A. ISRAEL, Reg. No. 41,867
JOHN R. KIRK JR., Reg. No. 24,477
PAUL R. KITCH, Reg. No. 38,206
TIMOTHY M. KOWALSKI, Reg. No. 44,192
JAMES F. LEA III, Reg. No. 41,143
HSIN-WEI LUANG, Reg. No. 44,213
ROBERT W. MASON, Reg. No. 42,848
ROGER L. MAXWELL, Reg. No. 31,855
ROBERT A. McFALL, Reg. No. 28,968
STEVEN T. McDONALD, Reg. No. 45,999
LISA H. MEYERHOFF, Reg. No. 36,869
STANLEY R. MOORE, Reg. No. 26,958
RICHARD J. MOURA, Reg. No. 34,883
MARK V. MULLER, Reg. No. 37,509
P. WESTON MUSSELMAN JR. Reg. No. 31,644
DANIEL G. NGUYEN, Reg. No. 42,933

SPENCER C. PATTERSON, Reg. No. 43,849
RUSSELL N. RIPPAMONTI, Reg. No. 39,521
ROSS T. ROBINSON, Reg. No. 47,031
STEPHEN G. RUDISILL, Reg. No. 20,087
HOLLY L. RUDNICK, Reg. No. 43,065
J.L. JENNIE SALAZAR, Reg. No. 45,065
KEITH W. SAUNDERS, Reg. No. 41,462
JERRY R. SELINGER, Reg. No. 26,582
ZACHARY J. SMOLINSKI, Reg. No. 47,100
GARY B. SOLOMON, Reg. No. 44,347
WAYNE O. STACY, Reg. No. 45,125
STEVE Z. SZCZEPANSKI, Reg. No. 27,957
ANDRE M. SZUWALSKI, Reg. No. 35,701
ALAN R. THIELE, Reg. No. 30,694
TAMSEN VALOIR, Reg. No. 41,417
RAYMOND VAN DYKE, Reg. No. 34,746
BRIAN D. WALKER, Reg. No. 37,751
GERALD T. WELCH, Reg. No. 30,332
HAROLD N. WELLS, Reg. No. 26,044
WILLIAM D. WIESE, Reg. No. 45,217

all of the firm of **JENKENS & GILCHRIST, a Professional Corporation**, 1445 Ross Avenue, Suite 3200, Dallas, Texas 75202-2799, as my attorneys and/or agents, with full power of substitution and revocation, to prosecute this application, provisionals thereof, continuations, continuations-in-part, divisionals, appeals, reissues, substitutions, and extensions thereof and to transact all business in the United States Patent and Trademark Office connected therewith, to appoint any individuals under an associate power of attorney and to file and prosecute any international patent application filed thereon before any international authorities, and I hereby authorize them to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/organization who/which first sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct them in writing to the contrary.

Please address all correspondence and direct all telephone calls to:

Gerald T. Welch, Esq.
Jenkins & Gilchrist, P.C.
1445 Ross Avenue, Suite 3200
Dallas, Texas 75202-2799
214/855-4500
214/855-4300 (fax)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAMED INVENTOR(S)

1	Robert H. Dueck		
	Full Name	Inventor's Signature	Date
	13766 Carlsbad Drive Santa Ana, California 92705	USA	
	Residence (city, state, country)	Citizenship	
	13766 Carlsbad Drive Santa Ana, California 92705		
	Post Office Address (include zip code)		

